iDock™ Alert Communication System





iDock Alert Communication System Design Features...

- Advanced 3-Color Light Communication System
- Interactive Message Display with Notifications, System
 Information, Maintenance History and More
- Raised Dome Button Design for Reliable Ease of Use
- Fault Code Display and Internal LED Lights for Easy
 Troubleshooting

VALUE-ENGINEERED

DOCK LEVELERS

- Optional Sensors for Counters of Equipment Usage and Dock Activity
- Activation of Lights Automatically with Optional Solid State Sensor
- Clear Red and Green Lights Provide Immediate and Recognizable Direction to Drivers and Loading Dock Staff
- Exterior Yellow Polypropylene Housing Will Not Rust, Pit or Corrode Like Similar Metal Units
- "High Visibility" Exterior Caution Signs
- Made in the USA

Effective Safety Communication

As a truck approaches the dock, exterior lights will flash green while interior lights are red. Once the truck is in position, the dock attendant will open the overhead door, secure the trailer with an optional restraint, and raise the leveler onto the trailer. This action will trigger one of the installed sensors to automatically change the exterior light to red, letting the driver know not to pull away, and interior light to green, indicating that it's safe to proceed with loading/unloading.

iDock Alert is also equipped with the advanced features that iDock Controls have to offer, including an interactive message display, an adjustable 3-in-1 LED light assembly for a clear indication of the dock conditions, and dome button technology for a reliable ease of use. The message display on the controls will provide fault notifications, as well as a menu with equipment information and maintenance history.

Monitor Dock Activity

Division of Systems

iDock Alert can have optional sensors installed at the loading dock to track equipment usage and dock activity. Using the message display on the controls, a dock attendant can view the counters from each of the installed sensors.

Technical Specifications
Exterior Light Housing Safety Yellow Polypropylene, UL Listed/Recognized
Power Consumption 0.8 Amps @120 Volts AC (controller) 0.06 Amps @ 120 Volts AC (LED)
Bulbs Standard: LED
Lens Diameter
Interior Control Panel Nema4 UL Listed/Recognized Dimensions 14"H 12"W x 8"D
Exterior Signs
Shipping Weight 25 lbs.
PULL JU9 PULL JU9 IN OR RO II OUT ON NO TU0 GREEN H31


LED Exterior Light and a set of standard mirrored image caution signs notify the truck driver.

ONLY

ONLY



Upgrade to iDock Controls with optional integrated equipment for a more efficient loading dock.

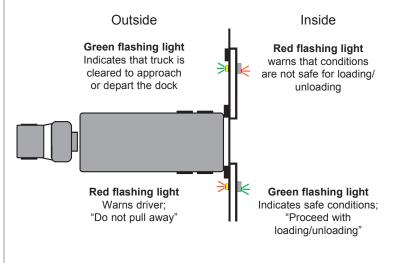

Designed, Engineered & Manufactured in the U.S.A.



DLM • Division of Systems, LLC Germantown, WI 53022 800.643.5424 • fax: 262.255.4199 • www.DLMdocks.com